


JUMBO TCS/26 CV Tyre Changer



GARAGE EQUIPMENT
since 1922

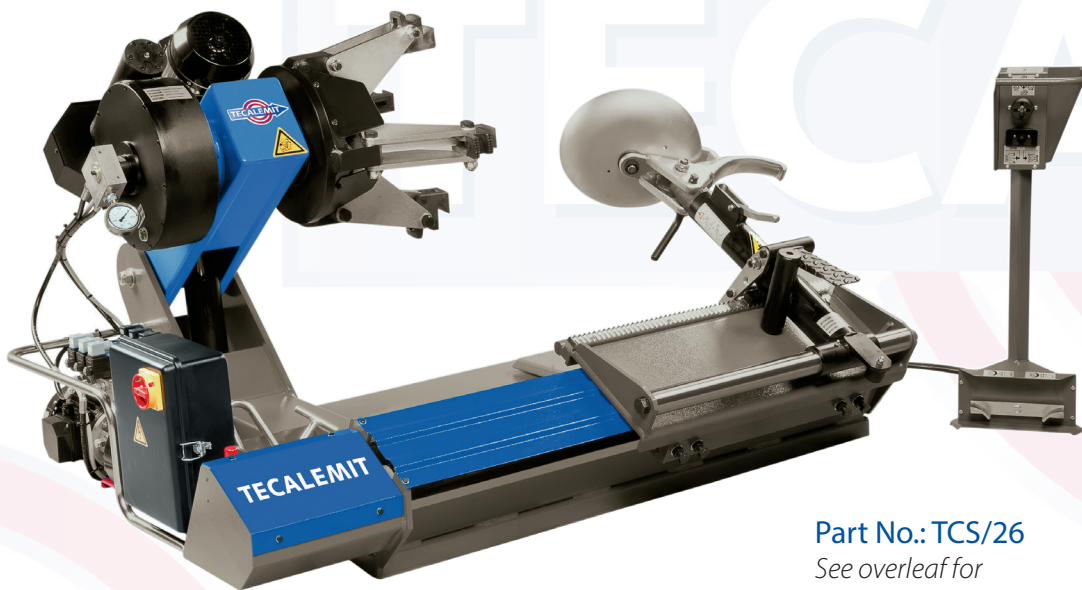

Part No.: TCS/26

*See overleaf for
more information*

- Tool trolley, lifting arm and chuck are hydraulically controlled
- 4 jaw universal chuck
- Adjustable hydraulic pressure for light wheels
- Chuck with bi-directional rotation function
- Tool arm with quick manual release

JUMBO TCS/26 CV Tyre Changer



GARAGE EQUIPMENT
since 1922

→ About the Jumbo TCS/26

The Tecalemit Jumbo TCS/26 CV tyre changer is designed to operate with truck wheels up to 26" in diameter and is fully adjustable to carefully handle lightweight alloy wheels. The TCS/26 sets the benchmark to be one of the strongest of its segment.

It comes with a universal pivoting tool, bead breaker disc and mounting/demounting hook to make changing CV tyres as easy as possible for the operator. The TCS/26 is operated by a wired mobile remote control unit. It also benefits from a small footprint allowing more space in the workshop than comparable machines.

→ Technical Specifications

Rim size.....	14"-26"
Min. clamping diameter.....	125 mm
Max. tyre diameter.....	1,600 mm
Max. tyre width.....	795 mm
Max. wheel weight.....	1,500 kg
Max. bead breaker force.....	3.1 t
Hydraulic control unit motor.....	1.5 Hp
Chuck rotation speed (Single).....	6 rpm
Power supply.....	3~400 V, 50-60 Hz
.....	1~230 V, 50-60 Hz
Dimensions (WxHxD).....	1,640 x 1,250 x 1,400 mm
Weight.....	575 kg

→ Part Nos. & Ordering Information

Commercial Tyre Changer 3Ph.....	TCS/26
Commercial Tyre Changer 1Ph.....	TCS/26/1

Issue No.: TCS/26 July 2023

Tecalemit Garage Equipment Co Ltd
Eagle Road, Langage Business Park,
Plymouth, United Kingdom PL7 5JY

Sales: 00 44 (0) 1752 219 111
Service: 00 44 (0) 1752 219 100
Fax: 00 44 (0) 1752 219 128
Email: sales@tecalemite.co.uk
Web: www.tecalemite.co.uk

All information in this document is correct at time of publication. Tecalemit reserves the right to amend and alter specifications without prior notice. Please confirm any critical requirements with your supplier at time of ordering.

