

Lubemaster Mobile Servicing Unit




GARAGE EQUIPMENT
since 1922



Part No.: SM/5551/103

*See overleaf for
more information*

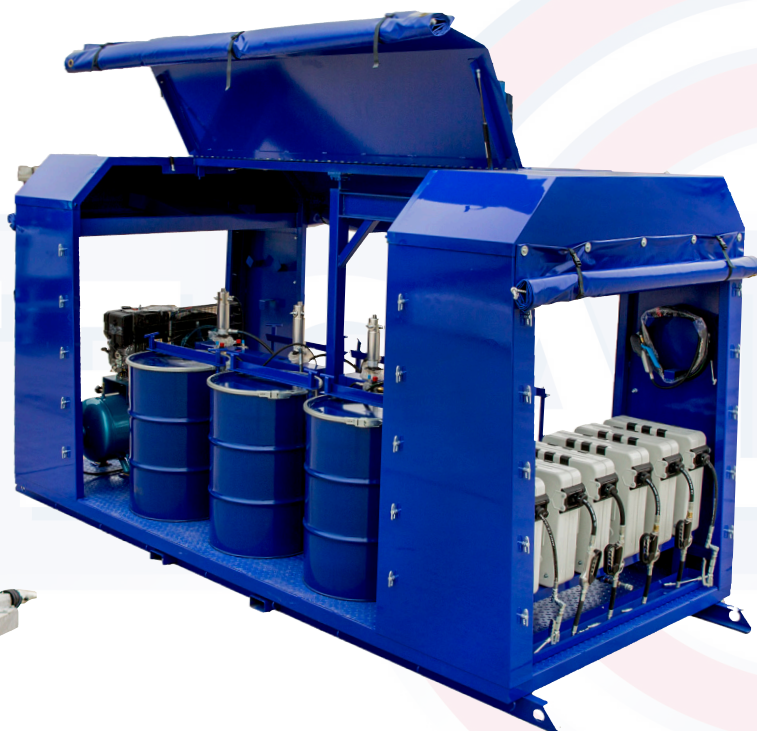

Part No.: SM/5550/103

*See overleaf for
more information*

Tecalemit's Lubemaster mobile servicing units are an all-in-one solution for on-site vehicle maintenance and servicing. These units are designed to withstand extreme conditions, making them perfect for operations in remote, isolated areas. For over 40 years, Tecalemit's Lubemaster units have set the standard as one of the most adaptable mobile lubrication packages.

The Lubemaster units come in two variations – skid-mounted for installation on a flat bed vehicle or as a versatile, compact trailer unit which can free up a vehicle for other duties. These units can be found worldwide, delivering unrivalled efficiency and flexibility for on-site maintenance and vehicle servicing in various climatic conditions.

Key Features:

- ➔ 15m retractable hose reels
- ➔ Low pressure, air-operated oil pumps
- ➔ High pressure, air-operated grease pumps
- ➔ Self-contained storage of grease and oil containers
- ➔ Diesel powered air compressor
- ➔ Tool/storage area

Lubemaster Mobile Servicing Unit



→ About the SM/5550/103

The Lubemaster SM/5550/103 is a skid-mounted mobile servicing unit comprised of the following:

- 1 x Diesel powered compressor with steel air distribution system plus regulators, lubricators and connection hoses for all equipment
- 4 x 3:1 air-operated oil pump for 205l barrels
- 4 x 15m cased oil reel
- 4 x Oil dispensing nozzle
- 2 x 50:1 air-operated grease pump
- 2 x 15m cased grease reel
- 2 x Grease dispensing nozzle with Z swivel
- 2 x Grease drum cover for 180kg drums
- 2 x Grease follower plate for 180kg drums
- 1 x 10m air supply hose
- 1 x Tyre inflator

The 50:1 grease pumps are suitable for all greases up to and including NLGI 2. The 3:1 oil pumps are suitable all oils up to and including SAE 150.

These components are housed in a steel superstructure with aluminium panels. Gull-wing doors to allow barrels to be lowered into position. Heavy-duty, plastic-coated canvass sheets cover the access points on all sides, providing protection to the equipment when not in use.

→ Weights & Dimensions

SM/5550/103 Skid-mounted Mobile Servicing Unit

Weight.....TBC
L x H x W.....450 x 185 x 170 cm

SM/5551/103 Trailer Based Mobile Servicing Unit

Weight.....620kg
L x H x W.....367 x 152 x 170 cm

→ About the SM/5551/103

The Lubemaster SM/5551/103 is a trailer based mobile servicing unit comprised of the following:

- 1 x Diesel powered compressor with steel air distribution system plus regulators, lubricators and connection hoses for all equipment
- 3 x 3:1 air-operated oil pump for 50l barrels
- 3 x 15m cased oil reel
- 3 x Oil dispensing nozzle
- 1 x 50:1 air-operated grease pump for 50kg drums
- 1 x 15m cased grease reel
- 1 x Grease dispensing nozzle with Z swivel
- 1 x Grease drum cover for 50kg drums
- 1 x Grease follower plate for 50kg drums
- 1 x 10m air supply hose
- 1 x Tyre inflator

The 50:1 grease pumps are suitable for all greases up to and including NLGI 2. The 3:1 oil pumps are suitable all oils up to and including SAE 150.

These components mounted on a single axle trailer with jockey wheel and regulation road lighting. Alongside the rear-mounted, cased reels there is a lockable storage cabinet.

Issue No.: Lubemaster May 2023

Tecalemit Garage Equipment Co Ltd, Eagle Road, Langage Business Park, Plymouth, United Kingdom PL7 5JY

Sales: 00 44 (0) 1752 219 111
Service: 00 44 (0) 1752 219 100
Fax: 00 44 (0) 1752 219 128
Email: sales@tecalemmit.co.uk
Web: www.tecalemmit.co.uk

All information in this document is correct at time of publication. Tecalemit reserves the right to amend and alter specifications without prior notice. Please confirm any critical requirements with your supplier at time of ordering.

