

Quadra 4.0t Class IV OPTL & ATL Lift



GARAGE EQUIPMENT
since 1922



Part No.: SF/9259/REC

*See overleaf for
more information*

- Suitable for Class IV ATL & one person test lanes
- Electro-hydraulic operation
- Integral hydraulic flush fitting wheel play detectors and radius turning plates
- Electronic and hydraulic safety systems
- Mechanical latching system
- 4.0t lifting capacity
- Shallow platform design for installation into pre-existing floor recesses

Quadra 4.0t Class IV OPTL & ATL Lift



GARAGE EQUIPMENT
since 1922


→ About the SF/9259

Tecalemit have developed a 4.0t capacity lift specifically for installation into pre-existing MOT lift excavations. The Quadra compact lift meets UK MOT testing specifications for Class IV ATL & OPTL testing. The lift has a shallow profile and a slightly narrower overall width than the standard Quadra ATL lift allowing the lift to be installed into many floor recesses, prepared for both Tecalemit and other lift manufacturers' Class IV MOT lifts.

The lift platforms cross members and columns are manufactured from top grade materials to ensure longevity and performance without deflection and distortion. The Quadra Compact SF/9259 Class IV ATL/OPTL lift conforms to EN 1493 and CE requirements for lifting equipment.

→ Wheel Play Detectors

The wheel play detector system has been designed and is approved for use in Class IV OPTL/ATL testing. It is comprised of 2 hydraulically operated wheel play detector plates which are installed into the lift platforms. The left hand plate generates a turning movement and the right hand plate a lateral movement. The hydraulic power pack is mounted on the lift motor post. The wheel play detectors are operated via controls incorporated into a heavy duty hand lamp.

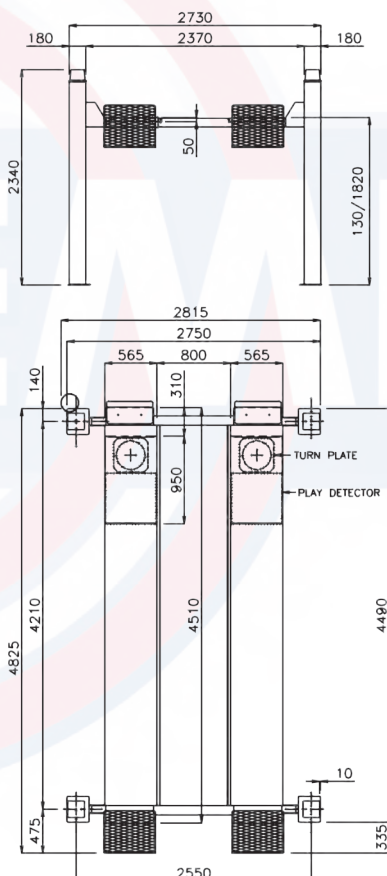

→ Technical Specifications & Dimensions

Minimum height.....	130mm
Raised height.....	1820mm
Motor supply.....	3.0kW
Maximum load.....	4000kg
Lifting/lowering time.....	50/45 secs
Net weight.....	800kg
Power supply.....	3ph 400V 50Hz / 1ph 230V 50Hz
Fused isolator rating.....	3ph 20amp / 1ph 30 amp

→ Part Nos. & Ordering Information

Quadra 4.0t Class IV ATL Lift 3ph recessed	SF/9259/REC
Quadra 4.0t Class IV ATL Lift 1ph recessed	SF/9259/1/REC

**Surfaced mounted option available*

→ Options & Accessories

2.0t manual jacking beam.....	SS/8829
4 tube lighting kit.....	OA/60342
Drive through kit for recessed installations.....	OA/60394
Drive through kit for surface mounted lifts.....	OA/60412

→ Wheel Play Detector Specification

Operating Pressure.....	185kg/cm
Drive Over Capacity.....	2.6t (Axle)
Turning Plate Movement.....	+/- 15°
Lateral Plate Movement.....	+/-40mm

Issue No.: SF/9259 Aug 2021

Tecalemit Garage Equipment Co Ltd
Eagle Road, Langage Business Park,
Plymouth, United Kingdom PL7 5JY

Sales: 00 44 (0) 1752 219 111
Service: 00 44 (0) 1752 219 100
Fax: 00 44 (0) 1752 219 128
Email: sales@tecalemmit.co.uk
Web: www.tecalemmit.co.uk

All information in this document is correct at time of publication. Tecalemit reserves the right to amend and alter specifications without prior notice. Please confirm any critical requirements with your supplier at time of ordering.

