

# TTC/9620 Series TYRE CHANGER

>> 22" Tyre Changer with optional Technoroller

## PRODUCT PACKAGE INCLUDES:

- ▶ CE approved Inflation tool
- ▶ Inflator connection hose
- ▶ Lubricant brush
- ▶ Tyre bead lever
- ▶ Bead breaker cover
- ▶ Mounting head cover
- ▶ Mounting head protection kit
- ▶ Jaw protection kit



GARAGE EQUIPMENT  
since 1922

*Image shows tyre changer with optional Technoroller*

# TTC/9620 Series TYRE CHANGER

>> 22" Tyre Changer with optional Technoroller

## ABOUT THE TTC/9620 SERIES

TTC/9620 is the latest generation of Tecalemit automatic tyre changer.

Structural rigidity is the single most crucial feature of any tyre changer. The 'G' frame concept is unique to the Tecalemit range and ensures the operating head positioning is accurate and stable – protecting expensive tyres and wheels from damage.

Supplied as standard without a Technoroller system (available as an option), TTC/9260 offers external clamping for wheel rims up to 22" diameter. The operating head is tilted manually, providing easy access to the circular turntable. Ideal for use in general workshops and servicing facilities.

Tecalemit tyre changers are manufactured in our state-of-the-art factory near Modena, Italy, using only the highest grade materials and industry-leading engineering and design.


## FEATURES:

- ▶ Turntable includes 4 raised sections to aid in more accurate position of the wheel on the clamping jaws
- ▶ Plastic jaw protection
- ▶ G-Frame concept increases machine rigidity and reduces the forces inside the machine
- ▶ 22" turntable with 2 speed motor and pedal selection for second speed
- ▶ Optional Technoroller assistant arm reducing operator effort during the mounting - demounting process
- ▶ Mounting head with automatic clearance function
- ▶ Mounting arm with rigid hexagonal profile
- ▶ Mounting column with extra-wide diameter and pneumatic locking system

## TECHNOROLLER AND ITS BENEFITS

TECHNOROLLER is a pneumatic device to assist during mounting and demounting operations of any type of passenger car and light commercial vehicle tyre. It is especially recommended for mounting and demounting UHP and RFT tyres.

Control switches are accessible from any working position and the high position of the follower arm facilitates all operations on the tyre bead.

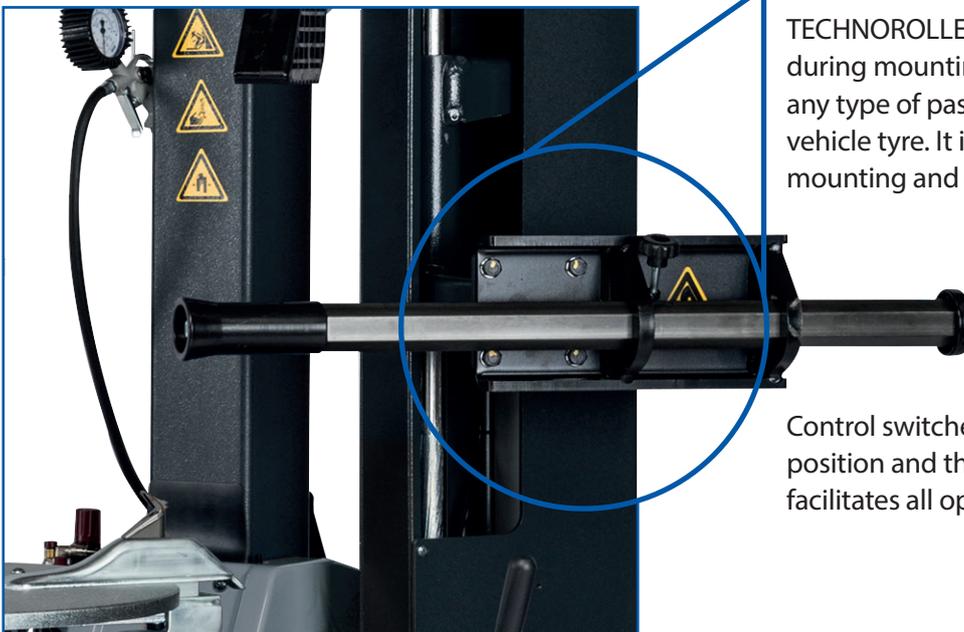

## OPTIONS AND ACCESSORIES:



Pressing Tool  
Part No. OA/108055



Jaw protection Kit  
Part No. OA/101502



Demount Head Protection  
Part No. OA/101608



Mounting Tool Cover  
Part No. OA/102725



Bead Breaker Protection  
Part No. OA/106152



Plastic Rim Protection  
Part No. OA/105191



Motorcycle/ Scooter Adapter  
Set of 4  
Part No. OA/101575



Motorcycle Bead Breaker  
Part No. OA/101518



Motorcycle Mounting Head Kit  
Part No. OA/103210



Motorcycle Bead Pressing Device  
Part No. OA/104644



Wheel Roller Board  
Part No. OA/106190



External Inflation Kit  
Part No. OA/108913



Storage Kit  
Part No. OA/102584



Bead Pressing Device Thin  
Part No. OA/103261



Bead Pressing Device Thick  
Part No. OA/103216



Side Lift (shown with roller board)  
Part No. OA/107467

# TTC/9620 Series TYRE CHANGER




GARAGE EQUIPMENT  
since 1922



Image shows tyre changer with optional Technoroller

## DIMENSIONS:

Max. dimensions (WxDxH) 1860 x 1660 x 1350 mm

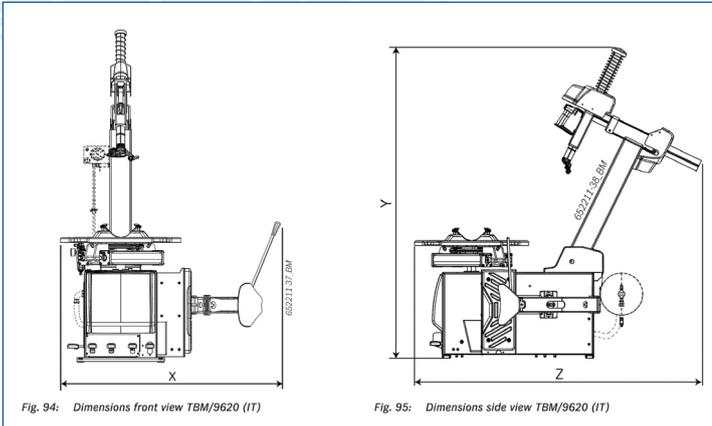

## TECHNICAL SPECIFICATION:

- ▶ Outside rim clamping min/max.....10"/22"
- ▶ Inside rim clamping min/max.....12"/24"
- ▶ Rim width min/max.....3"/11"
- ▶ Max. wheel diameter.....1100mm
- ▶ Bead breaker range min/max.....65mm/305mm
- ▶ Air connection.....8-10bar
- ▶ Speed of rotation.....7-15rpm
- ▶ Net weight.....230kg
- ▶ Power Supply.....240v Single Phase

## ORDERING INFORMATION:

- 22" Tyre Changer.....TTC/9620
- 22" Tyre Changer with Technoroller.....TTC/9620/T

### ISSUE NO.: 8722

Tecalemit Garage Equipment Co Ltd  
Eagle Road, Langage Business Park  
Plymouth, United Kingdom, PL7 5JY

Sales:.....00 44 (0) 1752 219 111  
Service:.....00 44 (0) 1752 219 100  
Fax:.....00 44 (0) 1752 219 128  
Email:.....sales@tecalemmit.co.uk  
Web:.....www.tecalemit.co.uk



All information in this document is correct at time of publication. Tecalemit reserves the right to amend and alter specifications without prior notice. Please confirm any critical requirements with your supplier at time of ordering.

## TECALEMIT TYRE CHANGER RANGE AT A GLANCE:

Feature	TTC/9620	TTC/9624S/T	TTC/9628S/T	TTC/9628S/LL/T	TTC/9630S/T
Standard turntable or centre post clamping	Turntable	Turntable	Turntable	Turntable	Centre Post
Internal clamping range	12" - 24"	10" - 24"	13" - 32"	13" - 32"	N/A
External clamping range	10" - 22"	12" - 28"	12" - 28"	12" - 28"	13" - 30"
Rim width	3" - 11"	3" - 12.5"	3" - 15"	3" - 15"	up to 15"
Max wheel diameter	1100mm	1200mm	1200mm	1200mm	1200mm
Leverless	-	-	-	✓	Optional
Pneumatic tilt back pole	-	✓	✓	✓	✓
Ergo Control bead breaker	-	✓	✓	✓	✓
Wheel lift	Optional	Optional	Optional	Optional	✓
Pneumatic/Manual operating head	Manual	Manual	Pneumatic	Pneumatic	Pneumatic
Technoroller assistant arm	Optional	✓	✓	✓	✓ with double horizontal arm
Power options	1ph Inverter, 3ph	1ph Inverter, 3ph	1ph Inverter only	1ph Inverter only	1ph Inverter only
Turntable speed	1ph - 2 speed	1ph Inverter - Variable speed	1ph Inverter - Variable speed	1ph Inverter - Variable speed	1ph Inverter - Variable speed