

TIRO Automatic Tyre Changer with assistant arm



GARAGE EQUIPMENT
since 1922



Part No.: TTC/TIRO/1/RAL5002

*See overleaf for
more information*

- ▶ Pneumatic high pressure bead breaker
- ▶ Pneumatic locking system for operating arm
- ▶ 2 direction turntable
- ▶ Pneumatically controlled tilting column for improved accessibility
- ▶ Extended clamping jaws for improved operation
- ▶ Ideal for working with run flats

TIRO Automatic Tyre Changer with assistant arm



GARAGE EQUIPMENT
since 1922

► About the TTC/TIRO

The TTC/TIRO automatic tyre changer has a second to none proven performance; even in the most demanding tyre shops. The bead breaker is suitable for larger diameter wheels and extended clamping jaws which can safely accommodate a wider range of wheel designs. The TTC/TIRO features a pneumatically controlled tilting column. The heavy duty construction of the column and frame of the machine ensures good stability of the head whilst in operation.


The TTC/TIRO Automatic tyre changer is supplied complete with the roller and assistant arm system. These pneumatically operated tools enable low aspect ratio (profile), run-on-flat and very wide tyres to be removed and fitted without the risk of damage to the tyre, wheel rim or operator.

► Technical Specifications

Net weight.....	339kg
Electrical motor.....	0.75kW 1 Speed
Operating pressure.....	8 - 10 bar
Bead breaker force.....	2500kg
Min/Max rim diameter.....	10" - 24"
Maximum tyre diameter.....	1000mm
Maximum tyre width.....	330mm

► Ordering Information

Automatic Tyre Changer 1ph with roller & assistant arm.....TTC/TIRO/1/RAL5002

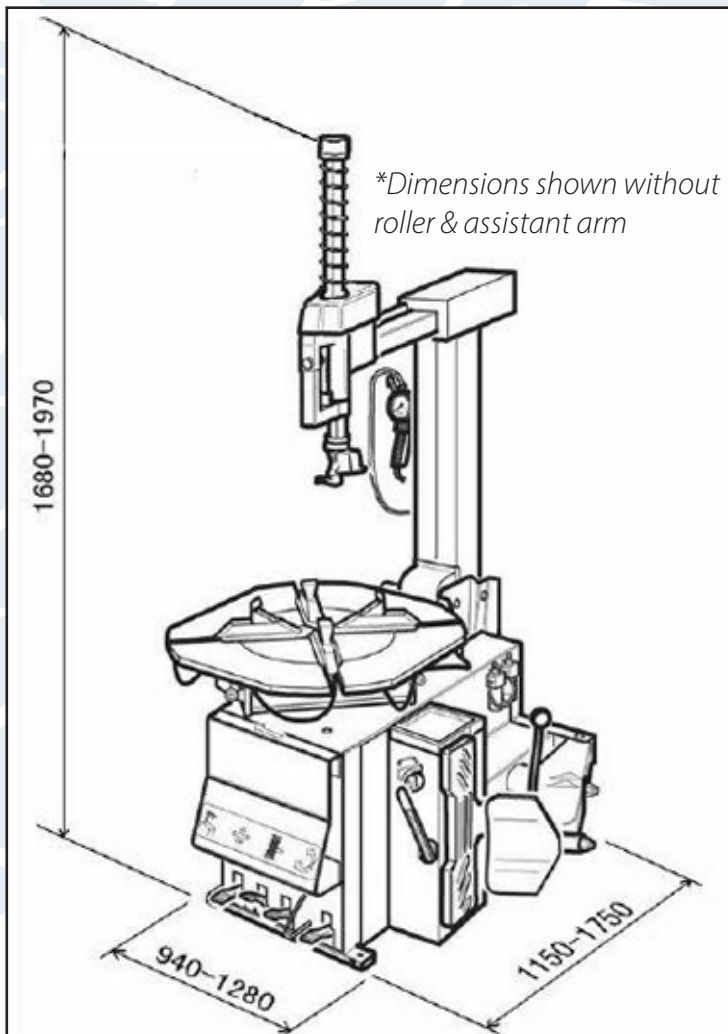

Issue No.: TTC/TIRO May 2021

Tecalemit Garage Equipment Co Ltd
Eagle Road, Langage Business Park,
Plymouth, United Kingdom PL7 5JY

Sales: 00 44 (0) 1752 219 111
Service: 00 44 (0) 1752 219 100
Fax: 00 44 (0) 1752 219 128
Email: sales@tecalemmit.co.uk
Web: www.tecalemit.co.uk

All information in this document is correct at time of publication. Tecalemit reserves the right to amend and alter specifications without prior notice. Please confirm any critical requirements with your supplier at time of ordering.

