Quadra 4.0t 5.0m Service & MOT Lift





- → Ideal for cars and light vans
- → Suitable for servicing & repairs or basic MOT
- → Low access height
- → Mechanical and hydraulic safety systems
- → Audible warning on descent

Quadra 4.0t 5.0m Service & MOT Lift





→ About the SF/9084

The SF/9084 is a heavy-duty lift designed for use with a broad range of cars and light goods vehicles up to a GVW of 4000kg.

With a wide drive through dimension between the columns and a total platform length of 5000mm, access onto the lift is easy and the relatively low platform profile of just 165mm makes the lift ideal for surface mounted installations. The SF/9084 is ideal for all types of general servicing and maintenance work.

Installation of the SF/9084 requires a level concrete floor of minimum C30 grade concrete of 160mm thickness. Power supply via a fused 20 amp isolator.

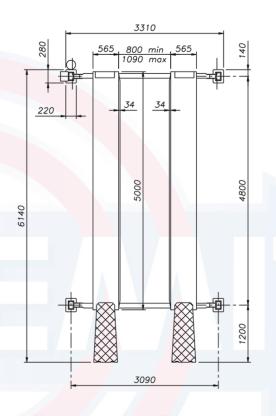



→ Technical Specifications & Dimensions

Minimum height	165mm
Raised height	
Motor supply	3.0kW
Maximum load	4000kg
Lifting time (3ph)	35 secs
Lowering time (3ph)	35 secs
Net weight	1080kg
Power supply	3ph 400V 50Hz
Fused isolator rating	20 amp

→ Part Nos. & Ordering Information

Quadra 4.0t Service Lift, 3ph surface mounted
SF/9084
Quadra 4.0t Service Lift, 1ph surface mounted
SF/9084/1

*For recessed installation, add/REC to part number

→ Options & Accessories

2.0t Jacking Beam (manual)	SS/8829/KIT
2.0t Jacking Beam (pneumatic)	SS/8829/P
3.0t Jacking Beam (manual)	SS/8839/KIT
3.0t Jacking Beam (pneumatic)	SS/8839/P
Air Supply Kit for pneumatic jacking beams.	OA/62335
24V LED Lighting Kit	OA/60342
Drive-through Kit (surface mounted)	
Drive-through Kit (recessed)	OA/60394
Surface-mounted Radius Plates	OA/60347

Issue No.: SF/9084 Aug 2023

Tecalemit Garage Equipment Co Ltd, Eagle Road, Langage Business Park, Plymouth, United Kingdom PL7 5JY

Sales: 00 44 (0) 1752 219 111
Service: 00 44 (0) 1752 219 100
Fax: 00 44 (0) 1752 219 128
Email: sales@tecalemit.co.uk
Web: www.tecalemit.co.uk

All information in this document is correct at time of publication. Tecalemit reserves the right to amend and alter specifications without prior notice. Please confirm any critical requirements with your supplier at time of ordering.











