Corto 3.0t 1.4m Mid-Rise Lift





→ 3.0t lifting capacity

→ Low profile access of 96mm

→ Maximum working height of platforms 930mm

→ Electro-hydraulic operation

Double volumetric cylinder under each platform

→ Fast lifting time of 30 seconds

Suitable for use in fast fits & tyre shops

→ Single phase power supply

Corto 3.0t 1.4m Mid-Rise Lift




→ About the SF/9130/1

The SF/9130/1 is a short platform mid-rise scissor lift developed specifically for use in the fast fit/tyre shop environment.

With a compact design and the opportunity for easy re-location the SF/9130/1 provides a time & cost saving, wheel-free, lifting solution where rapid access to wheels, brakes and certain suspension and steering components is required.

With a lifting height of 930mm achieved in 30 seconds, vehicles of up to 3000kg are safely positioned at a convenient working height to enable a wide range of servicing work to be undertaken.

The SF/9130/1 also features a very low profile, when lowered, of just 96mm, allowing access to most cars and car derived vans, even those with low front spoilers.

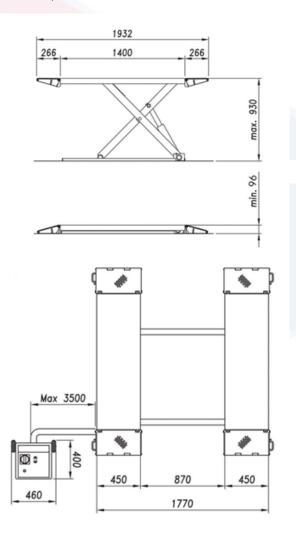

→ Technical Specifications & Dimensions

Maximum load	3000kg
Lifting / lowering time	30 - 35 secs
Maximum lifting height	930mm
Minimum lifting height	96mm
Length	1400mm / 1932mm
Overall width	1770mm
Motor	230/400V 50Hz

→ Part Nos. & Ordering Information

3.0t Short Platform Mid-Rise Scissor Lift 1ph.....SF/9130/1 3.0t Short Platform Mid-Rise Scissor Lift 1ph, Self-install......SF/9130/1/SI

→ Options & Accessories

Mobility kit	OA/60568
Cross-piece for special vehicles	OA62468
20mm pads	OA/60603/20
40mm pads	OA/60603/40
80mm pads	OA/60603/80

Issue No.: SF/9130/1 Aug 2023

Tecalemit Garage Equipment Co Ltd, Eagle Road, Langage Business Park, Plymouth, United Kingdom PL7 5JY

00 44 (0) 1752 219 111 Sales: Service: 00 44 (0) 1752 219 100 00 44 (0) 1752 219 128 Email: sales@tecalemit.co.uk Web: www.tecalemit.co.uk

All information in this document is correct at time of publication. Tecalemit reserves the right to amend and alter specifications without prior notice. Please confirm any critical requirements with your supplier at time of ordering.











