

Leviathan 25t 4 Post Hydraulic Commercial Vehicle Lift



GARAGE EQUIPMENT
since 1922



Part No.: SF/9825

*See overleaf for
more information*

- Innovative design of columns without longitudinal welds
- Electro-hydraulic lifting system operated over a special double piston cylinder
- Safety system against obstacles, cable breakdown or looseness
- Motor equipped with thermal detector against overheating
- 24V "dead man" controls

Leviathan 25t 4 Post Hydraulic Commercial Vehicle Lift



GARAGE EQUIPMENT
since 1922

→ About the SF/9825



The SF/9825 is a homologated and certified product according to the European Machinery Directive 2006/42/CE and Harmonised Standard EN 1493:2010. It has an innovative design of columns without longitudinal welds. The safety valve prevents overpressure of the hydraulic system, there is special protection on the pulley zone and the motor is equipped with a thermal detector to prevent overheating.

→ Technical Specifications & Dimensions

Load capacity.....	25000kg
Platform length.....	8000mm
Platform working length.....	7640mm
Platforms width.....	810mm
Width between columns.....	3500mm
Distance between platforms.....	1000mm
Drive on height.....	240mm
Lifting height.....	1540mm
Lifting time.....	90 seconds
Overall length.....	9576mm
Overall width.....	4269mm
Motor.....	3ph 230/400V 50 Hz. 5.5kW

→ Part Nos. & Ordering Information

25t capacity 4 Post Commercial Vehicle Lift.....SF/9825

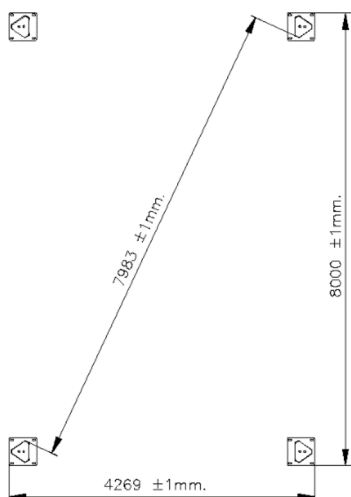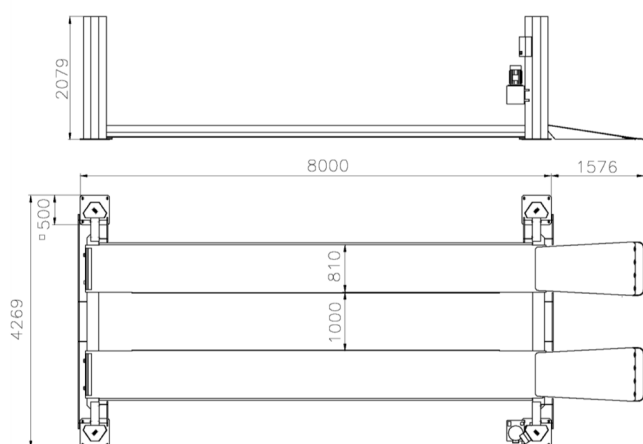

Issue No.: SF/9825 Jul 2023

Tecalemit Garage Equipment Co Ltd
Eagle Road, Langage Business Park,
Plymouth, United Kingdom PL7 5JY

Sales: 00 44 (0) 1752 219 111
Service: 00 44 (0) 1752 219 100
Fax: 00 44 (0) 1752 219 128
Email: sales@tecalemmit.co.uk
Web: www.tecalemit.co.uk

All information in this document is correct at time of publication. Tecalemit reserves the right to amend and alter specifications without prior notice. Please confirm any critical requirements with your supplier at time of ordering.

