


Jacking Beams & Pit Jacks



- Hydraulic operation
- Mechanical latching systems
- Meets EN1494 standards
- Pit Jacks manufactured to suit any pit
- Air operated options available
- Extra-wide extending top beam
- Pressure relief valve to prevent overloading
- Easy roll from high quality roller bearings

Jacking Beams & Pit Jacks

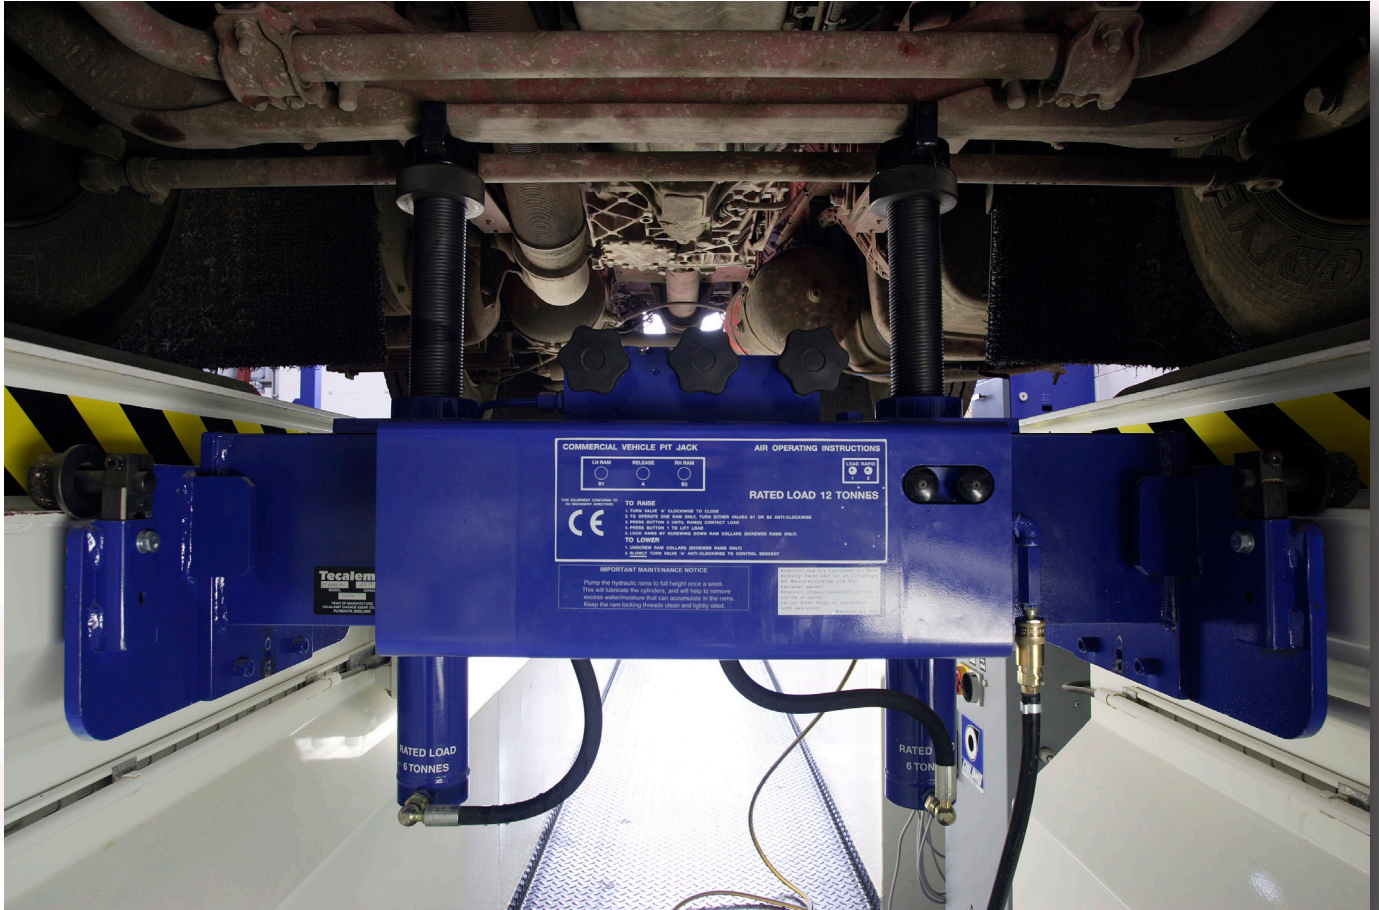

→ Installation & Application

With the increasingly diverse range of lift platform designs, it is important that the correct jacking beam is selected to meet the operational and safety requirements of the test bay or workshop. Tecalemit offers a range of jacking beams to suit the current range of Tecalemit 4 Post & Scissor lifts.

→ Car & LGV Pit Jacks

Tecalemit is able to supply a complete range of car and LGV pit jacks. Jacks are manufactured subject to site surveys. Prices available on application.

Tecalemit pit jacks have been developed for use in the most demanding environments. The jacks incorporate the highest quality materials and are manufactured to leading industry standards. The jacks are all suitable for use in commercial vehicle workshops and can be installed into an existing inspection pit or a new pre-fabricated pit.

→ 2.0t Manual Operation Jacking Beams (for air operation, add /P)

SS/8724.....Use with SF/9259 & SF/9006
SS/8821.....Use with SF/9944/4 range
SS/8823.....Use with SF/9004
SS/8825.....Use with SF/9436/SR
SS/8828.....Use with SF/9440
SS/8829/KIT.....Use with SF/9254,
SF/9008/4, SF/9057, SF 9057/4 range, SF/9094/EV
and SF/9095/EV

→ 3.0t Manual Operation Jacking Beams (for air operation, add /P)

SS/8833.....Use with SF/9250
SS/8836.....Use with SF/8976
SS/8839/KIT.....Use with SF/9257,
SF/9257/4, SF/9265, SF/9265/N, SF/9064/EV and
SF/9065/EV

→ 4.0 & 6.0t Manual Operation Jacking Beams (for air operation, add /P)

SS/8834 (4.0t).....Use with SF/8976 and SF/9480
SS/8696 (6.0t).....Use with SF/9128

→ Accessories for Jacking Beams

OA/62400.....Support kit for 2t & 3t jacks
OA/62401.....Support kit for 4t jacks
OA/62402.....Lifting pad extensions 60mm
OA/62403.....Lifting pad extensions 100mm
OA/62335.....Air supply kit for use with all beams

→ Jacking Beams up to 4.0t

SS/8722/----.....2t manual, Class IV approved
SS/8723----.....2t air operated, Class IV approved
SS/8728----.....2.8t manual, Class VII approved
SS/8730----.....2.8t air operated, Class VII approved
SS/8740----.....4t air operated, for 6.0 & 8.0t lifts

→ Jacking Beams up to 15.0t for Tecalemit lifts up to 33.0t

SS/8683.....8t manual operation
SS/8684.....8t air operation
SS/8681.....12t manual operation
SS/8682.....12t air operation
SS/8690.....15t air operation

Continued overleaf

Issue No.: Jacking Beams Jun 2017

Tecalemit Garage Equipment Co Ltd
Eagle Rd, Langage Business Park,
Plymouth, United Kingdom PL7 5JY

Sales: 00 44 (0) 1752 219 111
Service: 00 44 (0) 1752 219 100
Fax: 00 44 (0) 1752 219 128
Email: sales@tecalemmit.co.uk
Web: www.tecalemit.co.uk

All information in this document is correct at time of publication. Tecalemit reserves the right to amend and alter specifications without prior notice. Please confirm any critical requirements with your supplier at time of ordering.





Jacking Beams & Pit Jacks



→ Commercial Vehicle Pit Jacks

SS/8647/101.....	12t manual, parallel rollers and includes safety collar
SS/8647.....	12t manual, tapered rollers and includes safety collar
SS/8648.....	12t air operated, tapered rollers and includes safety collar
SS/8661.....	13t air operated. Not recommended for maintenance applications
SS/8649.....	13t air operated, parallel rollers. Not recommended for maintenance applications
SS/8649/101.....	13t air operated, tapered rollers. Not recommended for maintenance applications
SS/8665.....	20t air operated, twin ram

A Pit survey form is required for all Tecalemit Pit Jacks to ensure that the Pit Jack fits the pit correctly.

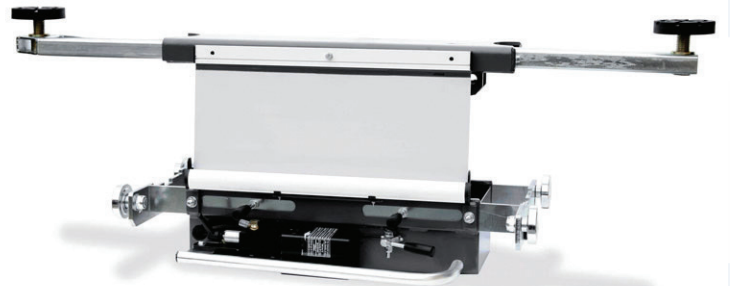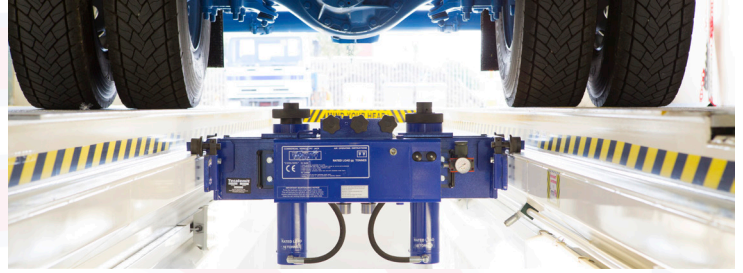

→ Accessories for Commercial Pit Jacks

OA/60170.....	Spreader beam 10t
.....	83cm minimum pit width
OA/60171.....	Spreader beam 10t
.....	94cm minimum pit width
OA/60172.....	Spreader beam 10t
.....	107cm minimum pit width
OA/60173.....	Spreader beam 2.8t
.....	Complete with raiser/pads
OA/60174.....	Diff adaptor
OA/60175.....	V crutch
OA/60176.....	Dish crutch
OA/60177.....	Chassis crutch
OA/60178.....	Extension tube 10cm
OA/60179.....	Extension tube 15cm
OA/60180.....	Extension tube 25cm
OA/60181.....	Extension tube 45cm
OA/62335.....	Air supply kit
comprised of 7.5 spiral air hose and couplers	

Issue No.: Jacking Beams Jun 2017

Tecalemit Garage Equipment Co Ltd
Eagle Rd, Langage Business Park,
Plymouth, United Kingdom PL7 5JY

Sales: 00 44 (0) 1752 219 111
Service: 00 44 (0) 1752 219 100
Fax: 00 44 (0) 1752 219 128
Email: sales@tecalemmit.co.uk
Web: www.tecalemit.co.uk

All information in this document is correct at time of publication. Tecalemit reserves the right to amend and alter specifications without prior notice. Please confirm any critical requirements with your supplier at time of ordering.

