

Duro 4.0t 4.8m Service & Wheel Alignment Lift



GARAGE EQUIPMENT
since 1922



Part No.: SF/9440

*See overleaf for
more information*

- Low-profile, floor mounted scissor lift
- A range of platform options available
- Low drive-on profile of just 200mm
- Hydraulic platform synchronisation
- Dual circuit hydraulic safety system

Duro 4.0t 4.8m Service & Wheel Alignment Lift




GARAGE EQUIPMENT
since 1922

→ About the SF/9440


Tecalemit's SF/9440 scissor lift is the perfect solution for workshops requiring the space-saving benefits of a scissor lift, without the costly excavation of a recess in the floor. Through ingenious engineering and the use of high-quality materials and components, the collapsed height of the lift is just 200mm, lower than most speed bumps! This allows easy access for most cars and light vans up to a gross weight of 4,000kg.

The SF/9440 has a choice of lifting platform options starting with a standard flat platform, perfect for servicing and repair work. Other options include a platform fitted with rear slip plates enabling vehicle geometry checks & adjustments and a platform housing an integral wheel free lifting system.

The SF/9440 incorporates independent hydraulic safety circuits, with overload safety controls and hydraulic synchronisation of the platforms. The lift must be installed onto a level concrete floor of a minimum 160mm thickness and requires a 3ph power supply via a 20 amp fused isolator.

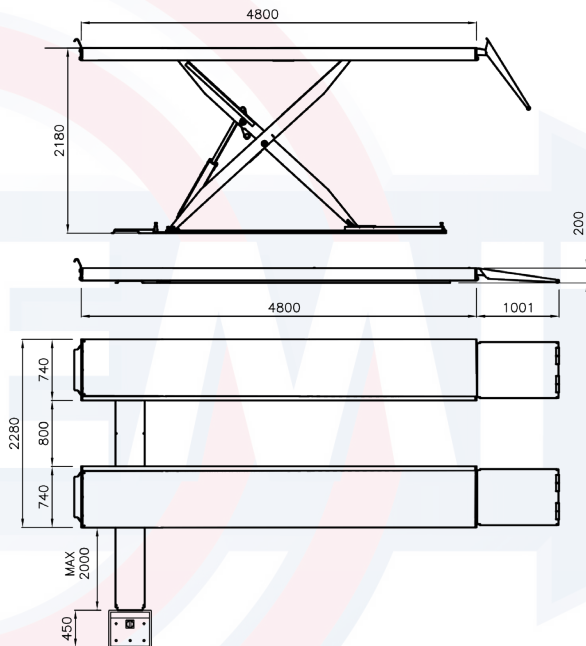

Optional Platform Dimensions

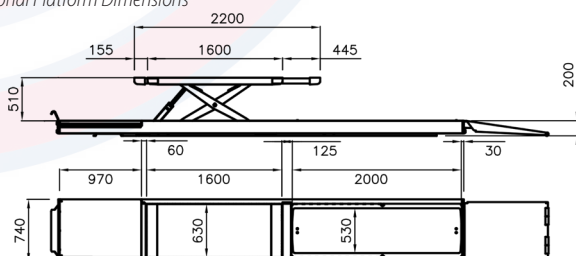

→ Technical Specifications & Dimensions

Pad height min.....	180mm
Raised height.....	2,180mm + (457mm)
Motor supply.....	230-400V 3kW /3ph - 50Hz
Maximum load.....	4,000kg
Lifting/lowering time.....	42 secs/43 secs
Net weight.....	1,800-2,600kg
Operation.....	Electro-hydraulic
Pneumatic feed.....	6-8 Bar

→ Part Nos. & Ordering Information

4.0t Service Lift 3ph.....	SF/9440
As SF/9440 with rear wheel slip plates.....	SF/9440/4
As SF/9440 with auxiliary lifting tables.....	SF/9440/5
As SF/9440/4 with auxiliary lifting tables.....	SF/9440/6

→ Options & Accessories

2.0t capacity hydraulic jacking beam.....	SS/8828
2.0t Jacking Beam (pneumatic).....	SS/8828/P
Air Supply Kit for pneumatic jacking beams.....	OA/62335
Cross beam member (pair) <i>for aux. lift</i>	OA/61130
Recessed Radius Plates.....	OA/61132
24V LED Lighting Kit.....	OA/60589
20mm pads.....	OA/60603/20
40mm pads.....	OA/60603/40
80mm pads.....	OA/60603/80

Issue No.: SF/9440 Aug 2023

Tecalemit Garage Equipment Co Ltd, Eagle Road, Langan
Business Park, Plymouth, United Kingdom PL7 5JY

Sales: 00 44 (0) 1752 219 111
Service: 00 44 (0) 1752 219 100
Fax: 00 44 (0) 1752 219 128
Email: sales@tecalemmit.co.uk
Web: www.tecalemit.co.uk

All information in this document is correct at time of publication. Tecalemit reserves the right to amend and alter specifications without prior notice. Please confirm any critical requirements with your supplier at time of ordering.

