

# Corto 4.0t 1.5m Recessed Lift



GARAGE EQUIPMENT  
since 1922



**Part No.: SF/8994**

*See overleaf for  
more information*

- Auto-levelling platforms
- 24V control system
- Acoustic warning alarm during final lowering phase
- Hydraulic platform synchronisation
- Extendable platforms 1525 - 2005mm

# Corto 4.0t 1.5m Recessed Lift




GARAGE EQUIPMENT  
since 1922


## → About the SF/8994

The SF/8994 short platform, recessed scissor lift from Tecalemit has been developed for use in all car and LGV workshops, particularly where space is at a premium. Short platform lifts provide an excellent solution allowing the operator to work on the vehicle at ground level without the obstruction of lifting posts and lift platforms and wheel free at a full working height for general servicing and repairs.

It is advised that operators consult their Tecalemit Area Sales specialist for guidance on location of the lift and control box unit and for excavation plans.

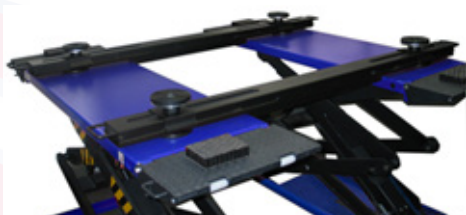

Cross piece for special vehicles: OA/61130

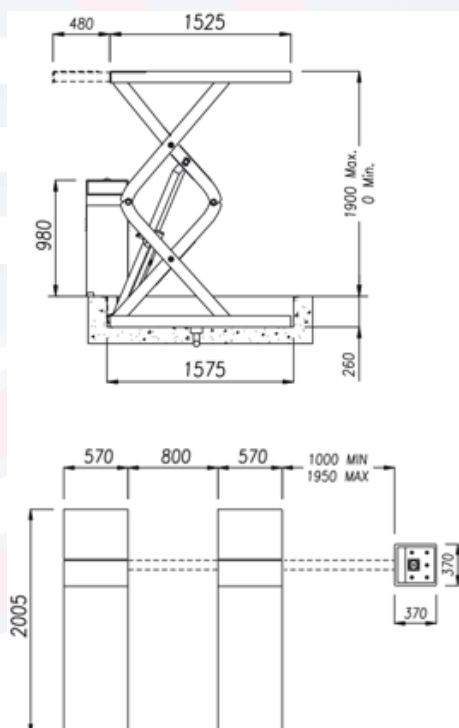

## → Technical Specifications & Dimensions

Raised height.....	1900mm
Motor supply.....	400 3kW - 3ph 50Hz
Maximum load.....	4000kg
Lifting/lowering time.....	35/35 secs
Net weight.....	700kg
Operation.....	Electro-hydraulic
Shipping specifications.....	160 x 65 x 130cm

## → Part Nos. & Ordering Information

4.0t Short Platform Scissor Lift, 3ph.....	SF/8994
4.0t Short Platform Scissor Lift, 1ph.....	SF/8994/1

## → Options & Accessories

20mm pads.....	OA/60603/20
40mm pads.....	OA/60603/40
80mm pads.....	OA/60603/80
Cross piece for special vehicles.....	OA/61130
Fitting frame.....	OA/62329

## Issue No.: SF/8994 Aug 2023

Tecalemit Garage Equipment Co Ltd, Eagle Road, Langleigh Business Park, Plymouth, United Kingdom PL7 5JY

Sales: 00 44 (0) 1752 219 111  
Service: 00 44 (0) 1752 219 100  
Fax: 00 44 (0) 1752 219 128  
Email: sales@tecalemmit.co.uk  
Web: www.tecalemit.co.uk

All information in this document is correct at time of publication. Tecalemit reserves the right to amend and alter specifications without prior notice. Please confirm any critical requirements with your supplier at time of ordering.

