Quadra 3.5t 4.3m MOT & Service Lift





- → Electronically controlled safety latches
- → Suitable for general MOT servicing & repairs
- → Compact space saving design
- → Suitable for retro-fitting into existing MOT Bays

Quadra 3.5t 4.3m MOT & Service Lift




GARAGE EQUIPMENT since 1922

→ About the SF/9436/SR

The Quadra SF/9436/SR lift is Tecalemit's general MOT & Service purpose 4 post platform lift recommended for use in car workshops. The lift has generous platform dimensions of 4300mm x 500mm but still maintains a compact overall length, including access ramps of under 5200mm.

The lift incorporates a complete range of safety features including mechanical and hydraulic safety systems. The floor onto which the lift is to be installed should be level +/-<8mm. The concrete pad onto which the columns are secured should be constructed of C30 concrete 160mm thick excluding the thickness of any screed or paving that may be added.

The SF/9436/SR requires a 3ph power supply via a fused isolator. Should a lighting kit be installed a neutral supply is required. Single phase option is also available.

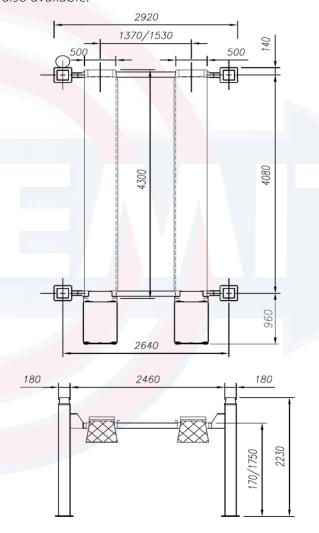

→ Technical Specifications & Dimensions

Maximum load	3500kg
Raised platform height	
Lifting time	50 sec
Lowering time	
Power supply	
Fused isolator rating	20 amp
Motor	2.2kW
Weight	830kg
Minimum height	

→ Part Nos. & Ordering Information

Ouadra 2 Et Convice Lift 2nh curface mounted	
Quadra 3.5t Service Lift 3ph surface mounted	
SF/9436/SR	
Quadra 3.5t Service Lift 1ph surface mounted	
SF/9436/SR/1	

*For recessed installation, add/REC to part number

→ Options & Accessories

2.Ut Jacking Beam	55/8825
4 Tube Lighting Kit (neutral required)	OA/60342
Drive-through Ramps (surface-mounted)	OA/60395
Drive-through Ramps (recessed)	OA/60394
Surface-mounted Radius Plates	OA/60346

Issue No.: SF/9436/SR Aug 2023

Tecalemit Garage Equipment Co Ltd, Eagle Road, Langage Business Park, Plymouth, United Kingdom PL7 5JY

Sales: 00 44 (0) 1752 219 111
Service: 00 44 (0) 1752 219 100
Fax: 00 44 (0) 1752 219 128
Email: sales@tecalemit.co.uk
Web: www.tecalemit.co.uk

All information in this document is correct at time of publication. Tecalemit reserves the right to amend and alter specifications without prior notice. Please confirm any critical requirements with your supplier at time of ordering.











