Leviathan 16t 4 Post Commercial Vehicle Lift



GARAGE EQUIPMENT



Part No.: SF/8898/V
See overleaf for more information

- Hydraulic operation no need for air supply
- Overload safety system
- → No noisy spindles or gearboxes
- Special heavy duty construction
- → 8.0m platforms as standard
- Option to order with extended platforms

Leviathan 16t 4 Post Commercial Vehicle Lift



→ About the SF/8898/V

The Leviathan 16t commercial vehicle lift from Tecalemit is heavy-duty. The lift platforms incorporate heavy gauge materials and unique designs to ensure total lifting safety, durability, and performance. The lift is powered by a 5.5kW motor operated from a single control box mounted on the master column.

The lift has been configured to accommodate a broad range of longer wheelbase, commercial, and public service vehicles up to a gross vehicle weight of 16000kg.

Design features include an additional width of 3500mm between the columns (allowing access for vehicles with fixed rear view mirrors) and 810mm wide platforms to ensure that twinwheeled vehicles are fully supported by the platform.

The lift should be installed in a covered area protected from prevailing weather. Consult your Tecalemit Area Sales Manager for floor specifications and power supply requirements.

→ Technical Specifications & Dimensions


Platform length	8000mm
Platform working length	7640mm
Platform width	810mm
Distance between platforms	1000mm
Lifting height	1540mm
Drive through width between columns	3500mm
Minimum platform height	240mm
Overall length	9576mm
Overall width	4269mm

→ Part Nos. & Ordering Information

Leviathan 16.0t Electro-hydraulic 8.0m Platform 3ph, surface mounted.....SF/8898/V

→ Options & Accessories

Lighting Kit	OA/62490
Platform Extensions (1.2m)	OA/62491
Drive-through Kit	OA/62492

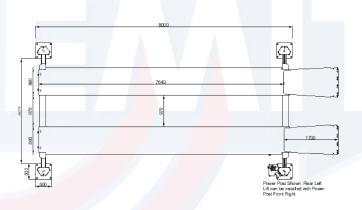

Issue No.: SF/8898/V Nov 2023

Tecalemit Garage Equipment Co Ltd Eagle Road, Langage Business Park, Plymouth, United Kingdom PL7 5JY

Sales: 00 44 (0) 1752 219 111 Service: 00 44 (0) 1752 219 100 Fax: 00 44 (0) 1752 219 128 Email: sales@tecalemit.co.uk Web: www.tecalemit.co.uk

All information in this document is correct at time of publication. Tecalemit reserves the right to amend and alter specifications without prior notice. Please confirm any critical requirements with your supplier at time of ordering.











